


# SC6500™

## Rider Scrubbers

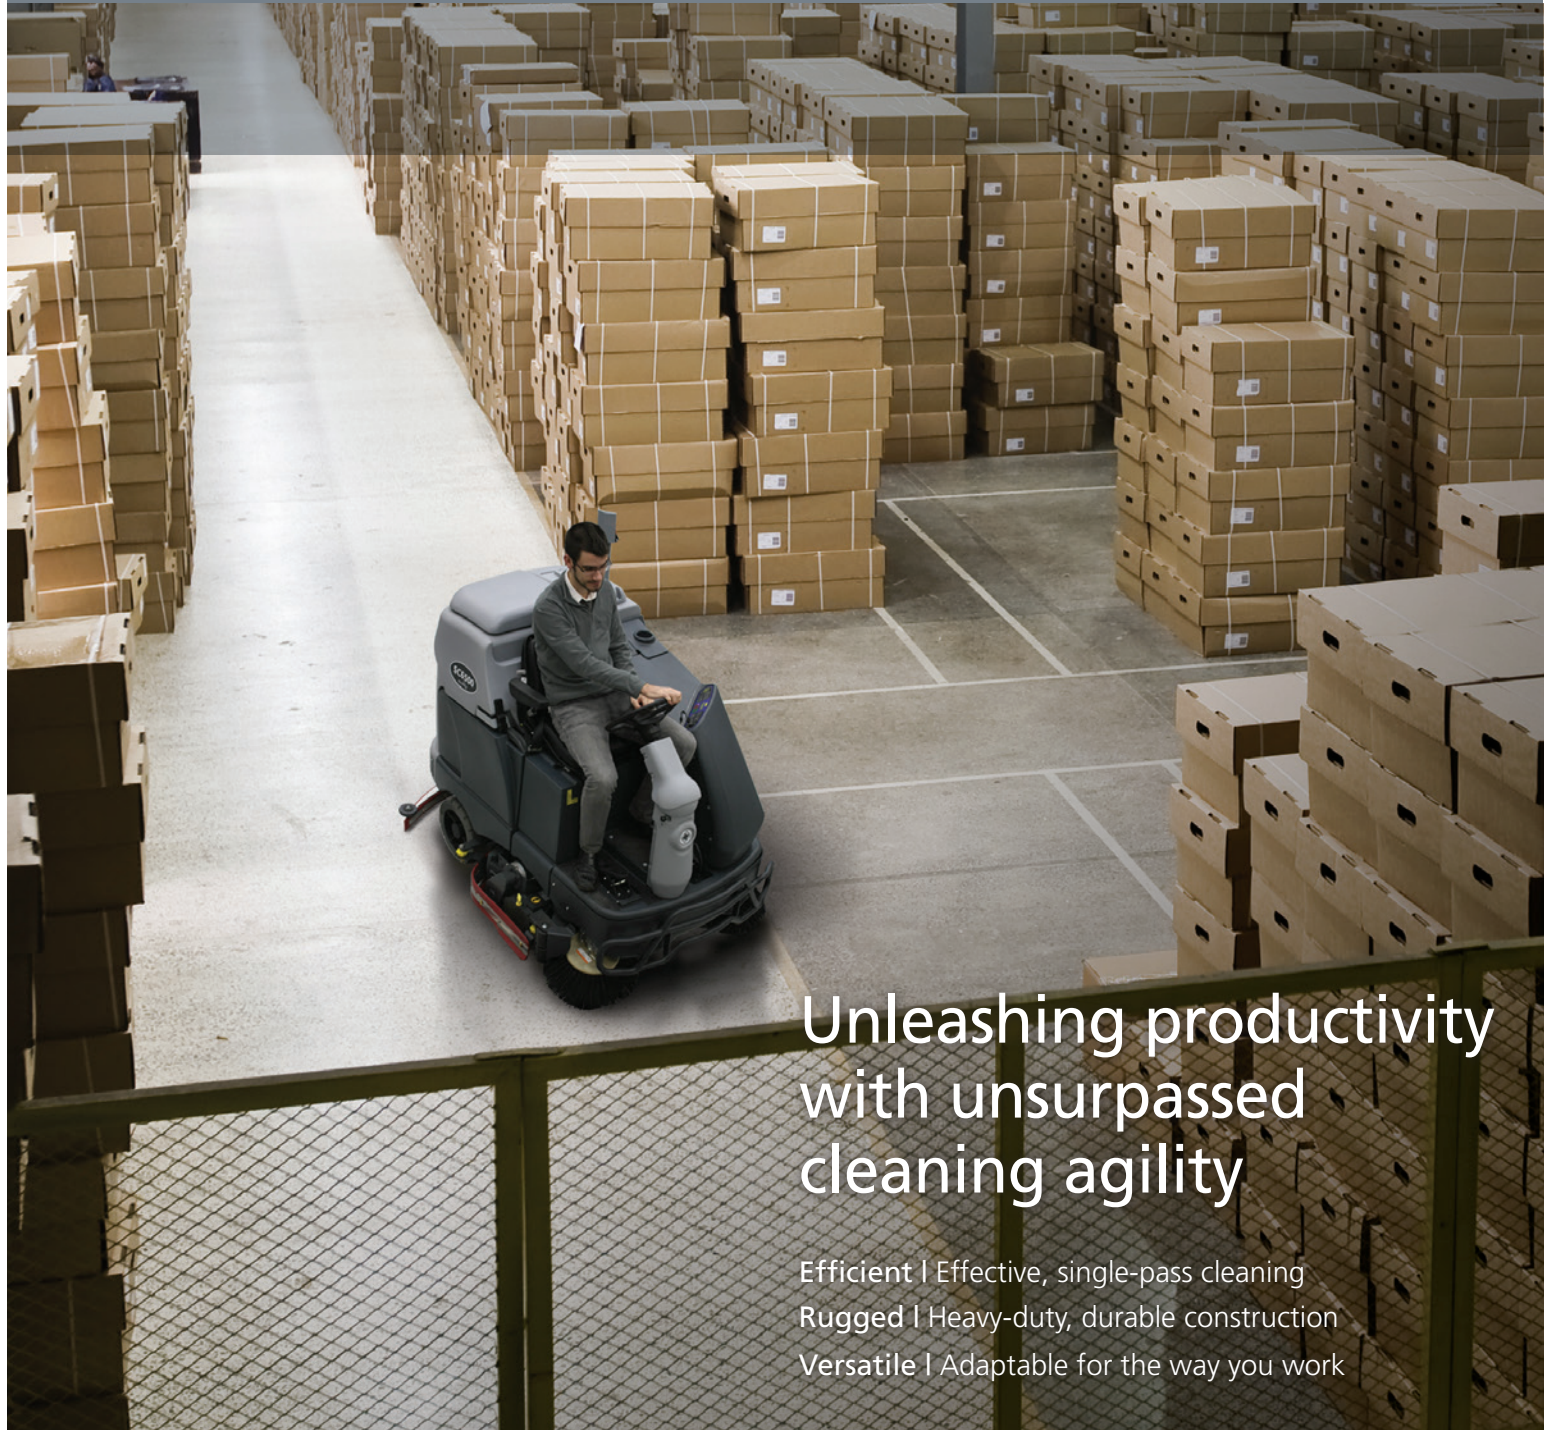

Unleashing productivity  
with unsurpassed  
cleaning agility

Efficient | Effective, single-pass cleaning  
Rugged | Heavy-duty, durable construction  
Versatile | Adaptable for the way you work



# Tough on dirt. Easy on operators.

Experience the combination of effortless control and efficient, sustainable scrubbing in one powerful, compact package: the Advance SC6500™ rider scrubber. The tight turning radius, simple operation and up to 48 inch cleaning path of the SC6500 makes cleaning the dirtiest floors a breeze for virtually anyone.



Available with  ecoflex™ system

**TrackClean**  
Centralized Fleet Management

## Efficient scrubbing.



With the tightest aisle turn in its class and large, 70 gallon solution and recovery tanks to maximize scrubbing time, the SC6500 helps you get the job done faster. And, with a high power scrub deck, a single pass is all you need to get an amazingly clean floor.

## Rugged construction.



Don't let the smooth, precise acceleration of its maintenance-free AC brushless propulsion drive fool you. With an industrial bumper, frame-mounted deflectors and a tubular, steel construction all specifically engineered for the most severe industrial applications, the SC6500 is as tough as they come and built to last.

## Versatile operation.



The SC6500 represents cleaning the way it should be—that is, exactly how you want it. With the optional EcoFlex™ system that allows you to use only the amount of chemical needed, an offset scrub deck that effectively cleans hard-to-reach edges and an ergonomic design compatible with your operators, the SC6500 easily adapts to the conditions you throw at it.

# An industrial scrubbing powerhouse.



- 1** The Advance EcoFlex™ System provides customizable settings to save water, chemical and brushes
- 2** Heavy-duty adjustable Linatex® side squeegees provide appropriate down pressure to leave floors completely dry
- 3** Yellow color-coded touch points simplify routine maintenance
- 4** Maintenance-free AC brushless propulsion drive delivers quiet, reliable, powerful and efficient performance
- 5** Frame-mounted rollers protect scrub deck from impact damage
- 6** Dual side brooms (cylindrical models) deliver true edge cleaning and prevent debris from fouling squeegees
- 7** High capacity 70 gallon tanks boost scrub time productivity
- 8** Optional dual vac system enhances water pickup on rough floors, even at high speeds
- 9** High-traction, non-marking, industrial wheels improve stability and control
- 10** Dual-disc brakes provide complete stopping power even on wet floors

Colleges  
Universities

Food & Beverage

Warehouses Athletic Facilities

Manufacturing Plants



Clear-View™ design and adjustable tilt steering column enable an ergonomic ride for most operators.



Large One-Touch™ controls make operation easy and accessible.



Powerful offset scrub deck provides edge and high productivity cleaning in a single pass.



Removable, high capacity detergent cartridge for sustained flexible cleaning is available with optional EcoFlex™ System.



## Technical Specifications

Models	SC6500™ 40C	SC6500™ 45C	SC6500™ 48C	SC6500™ 40D	SC6500™ 45D	SC6500™ 48D
<b>Scrubbing and Recovery Systems</b>						
Scrub Deck Type	Cylindrical			Disc		
Scrub Path	40 in (102 cm)	45 in (114 cm)	48 in (122 cm)	40 in (102 cm)	45 in (114 cm)	48 in (122 cm)
Scrubbing Coverage Rate Per Hour (Max.)	96,800	108,900	116,200	96,800	108,900	116,200
Scrub Brush Size	40 in x 8.5 in (102 cm x 22 cm)	45 in x 8.5 in (114 cm x 22 cm)	48 in x 8.5 in (122 cm x 22 cm)	2 x 20 in (51 cm)	3 x 16 in (41 cm)	3 x 17 in (43 cm)
Scrub Brush Speed	630 rpm			240 rpm	225 rpm	225 rpm
Brush Motor Power	2 x 1.5 hp (1.13 kW)			1 x 3.0 hp (2.24 kW)	3 x 1.5 hp (1.13 kW)	3 x 1.5 hp (1.13 kW)
Sweeping Path	57 in (145 cm)			-		
Debris Hopper Capacity	0.40 ft³ (11 L)	0.44 ft³ (12.5 L)	0.50 ft³ (14 L)	-		
Solution/Recovery Tank Capacity	70 gal (265 L)					
Vacuum Motor	0.8 hp (0.6 kW) - dual vac optional					
Waterlift	Single Vac - 64 in (163 cm) / Dual Vac - 67 in (170 cm)					
<b>Battery and Propulsion System</b>						
Battery Options / Maximum Run Time*	36 V, 420 Ah C20 – Up to 3.0 hrs. – 40 Cyl / 3.5 hrs. – 40 Disc 36 V, 450 Ah C6 (monoblock) – Up to 3.75 hrs. – 40 Cyl / 4.75 hrs. – 40 Disc					
Propulsion System	Variable speed AC brushless drive					
Propel Speed Forward	6.0 mph (9.5 km/h)					
Propel Speed Reverse	3.0 mph (5 km/h)					
Propel Motor (Peak)	3.0 hp (2.25 kW)					
Gradeability Transport @ Gross Weight	16% (9°)					
Scrubbing	10.5% (6°)					
<b>Dimensions / Weight / Sound</b>						
Length	74 in (187 cm)					
Width	48 in (121 cm)	54 in (136 cm)	56 in (141 cm)	43 in (108 cm)	52 in (131 cm)	53 in (133 cm)
Height	50 in (149 cm)					
Minimum Aisle Turn	84 in (214 cm)					
Weight GVW	3,325 lb (1,508 kg)	3,365 lb (1,508 kg)	3,410 lb (1,547 kg)	3,220 lb (1,460 kg)	3,270 lb (1,483 kg)	3,320 lb (1,506 kg)
Empty	2,897 lb (1,314 kg)	2,937 lb (1,332 kg)	2,982 lb (1,353 kg)	2,792 lb (1,266 kg)	2,842 lb (1,289 kg)	2,892 lb (1,312 kg)
Sound Level IEC 60335-2-72, ISO 11201*	70 dB A					

Specifications subject to change without notice.

\*Run-time will vary based on machine configuration and operating conditions.



## Optional Accessories

- Tubular steel heavy duty bumper
- Heavy duty front bumper
- Deluxe grammer seat and seat belt kit
- Refillable detergent cartridge
- CoolTool scrub and vac wand kit
- Recovery tank drain hose extension
- Floor mat kit
- 2nd vac motor kit
- Warning beacon kit
- Front headlight kit
- Back-up alarm kit
- Seat belt kit for standard seat
- Overhead guard
- Operator foot guard kit
- Solution auto-fill kit
- Battery roll out kit for 450 Ah C6 battery (batteries not included)

## Smart cleaning.

Our products are designed using innovative technologies that increase productivity and drive down the cost to clean.

Maintain peak performance with Nilfisk Parts.

## TrackClean

Centralized Fleet Management

Increase productivity with TrackClean asset management technology installed on your fleet of machines to monitor, verify and improve operational effectiveness.

Learn more: <http://www.advance-us.com/TrackClean>

Reach a new standard of cleaning power.

Visit <http://www.advance-us.com> or contact your Advance sales representative to learn more.

©2017 Nilfisk, Inc. Form L3398A 4-8-17



### Nilfisk, Inc.

9435 Winnetka Avenue North  
Brooklyn Park, MN 55445  
[www.advance-us.com](http://www.advance-us.com)  
Phone 800-214-7700  
Fax 800-989-6566

240 Superior Boulevard  
Mississauga, Ontario, Canada L5T 2L2  
[www.nilfisk-advance.ca](http://www.nilfisk-advance.ca)  
Phone 800-668-8400  
Fax 800-263-5111

