



2200-2400 E SERIES



- **6-12,000 LB. CAPACITY**
- **LIFT HEIGHTS TO 30 FT.**
- **C-THRU ROLLER MASTS**
- **OIL IMMERSED DISC BRAKES**
- **HIGH VISIBILITY OPERATORS COMPARTMENT**
- **ERGONOMIC CONTROLS**
- **EASY ON AND OFF ACCESS**
- **AVAILABLE FOUR WHEEL DRIVE**
- **FULL RANGE OF ATTACHMENTS**
- **FUEL EFFICIENT EPA COMPLIANT DIESEL ENGINE**



LOAD LIFTER FEATURES DO WORK FOR YOU

MACHINE APROX. WEIGHTS

6,000 lb - 6352 kg (14,400 lbs)
8,000 lb - 7031 kg (15,500 lbs)
10,000 lb - 8029 kg (17,700 lbs)
12,000 lb - 8890 kg (19,600 lbs)

MACHINE DIMENSIONS

A (Tilt Back) 14°
B (Tilt Forward) 24°
C (Machine Ground Clearance) 15"
D (Mast Ground Clearance) 12"
E (Counterweight Overhang) 6-10K 35", 12K 39"
F (Wheelbase) 83"
G (C/L Drive Axle to Face of Forks) 34 3/16"
H (Overall Length to Face of Forks) 6-10K 152 1/4", 12K 156 1/4"
I (Overall Height Top of Canopy) 97"
J (Turning Clearance) 2WD 173 1/2", 4WD 179"
K (Turning Radius) 2WD 168", 4WD 175"
L (Overall Width) 84"

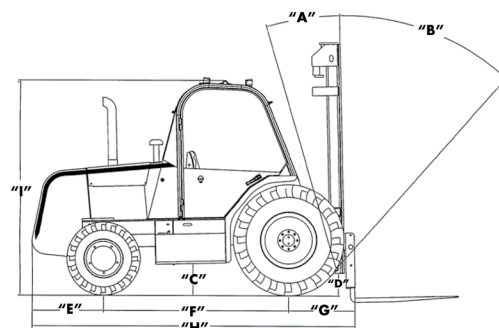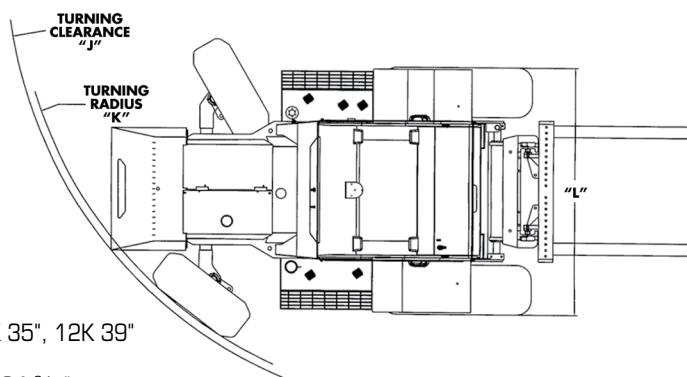

ENGINE

Make PERKINS 854F-E34T
Displacement 3.4 Litres (207.5 cu. in.)
Gross H.P. 74.3 H.P. (55 KW.)
Maximum Torque 291 NM. @ 1600 RPM (214.6 lb-ft)
Rated Speed 2500 RPM.

TRANSMISSION

Type 4 Speed Synchromesh with Power Reverser & Torque Converter
Speeds
1 4.6 km (2.9 mph)
2 9.6 km (6.0 mph)
3 17.6 km (11 mph)
4 29.6 km (19 mph)

HYDRAULIC SYSTEM

Pump Gear Type System c/w Load Sense Steering Circuit
Filter 25 Micron Replaceable Element
Modular Control Valve c/w Tilt Lock System

ELECTRICAL SYSTEM

Volts 12
Alternator 100 Amp.
Instrumentation Full LED Display

STANDARD EQUIPMENT

- 6" Mast Side Shift
- 4 Speed Synchromesh Transmission
- Power Reverser
- Electric Column Shift
- Tilt & Telescopic Steering Console
- Hydrostatic Power Load Sense Steering
- Safety Start
- Dry Type Air Cleaner
- Retractable Seat Belts
- Height Adjustable Seat
- L.E.D. INSTRUMENT DISPLAY (Hour Meter, Fuel Level, Coolant Temp, Alt, Pre Heater, Oil Pressure Gauge, Low Oil Press Warning, Trans Temp, Work Light Indicator, Park Brake, Work Light Switch)
- Overhead F.O.P.S. Canopy
- Circuit Breakers
- Block Heater
- Manifold Heater
- Heavy Duty Battery
- Anti Freeze -40
- Horn
- Four Work Lights
- Transmission De Clutch
- 14 foot C-Thru Mast
- 48" Carriage 5-6,000 lb
- 60" Carriage 8-12,000 lb
- 48" Forks

FLUID CAPACITIES

Cooling System 11.5 litres / 12.2 Quarts
Engine Oil 6.8 litres / 7.2 Quarts
Fuel 100 litres / 26.4 U.S. Gal.
Hydraulic Oil 85 litres / 22.5 U.S. Gal.
Transmission Oil 21.4 litres / 22.2 Quarts

BRAKES

Service Hydraulic Multiple Wet Disc
Parking Manual External Disc on Transmission

AXLES

Drive Heavy Duty Inboard Planetary Drive
Steer 2 WD Large 8" x 4" Solid Beam c/w Oversize Center Steer Control and Track Rod Design, Large Tapered Roller Bearing Spindle Wheel Ends
Steer 4 WD High Strength Cast Steel Housing c/w Planetary Drive Wheel Ends and 50° Lock Angle

TIRES

Drive 6,000 lb. and 8,000lb. 16.9 x 24 - 12 ply lug
10,000 lb. and 12,000lb. 15.5 x 25 - 12 ply lug
Steer 6,000 lb. 2WD 11:00 x 16 12 ply
8,000 lb. to 12,000 lb. 2WD 14 x 17.5 14 ply
4WD All 14 x 17.5 14 ply lug

OPTIONAL EQUIPMENT

- "Smart Shift" Full Powershift Transmission
- All Steel Ergonomic Cab Assembly
- Mirrors
- Air Conditioning
- Suspension Seats
- Cold Weather Package
- Vandalism Package
- Murphy Shutdown Systems
- Rear Tire Fenders
- Overhead R.O.P.S Cab Assembly
- High Air Intake
- Cyclonic Pre-Cleaner
- Power Brakes
- Lift Circuit Cushion Accumulator
- Fork Positioner
- Load Clamp
- Hydraulic Bucket
- Full Range of Attachments
- Twin Pak
- Front Fender Extensions

This information contained herein is general in nature and not intended for specific application purpose. Load Lifter reserves the right to make changes in specifications, make improvements, or discontinue manufacture at any time without notice or obligation.

LOAD LIFTER MANUFACTURING LTD.

3 Anderson Blvd., Stouffville, Ontario, Canada, L4A 7X4

Tel. 905-642-9756, Fax. 905-640-1437, www.load-liftermfg.com, info@load-liftermfg.com

